

Owner's Manual




9" BAND SAW



QUESTION...

1-877-393-7121

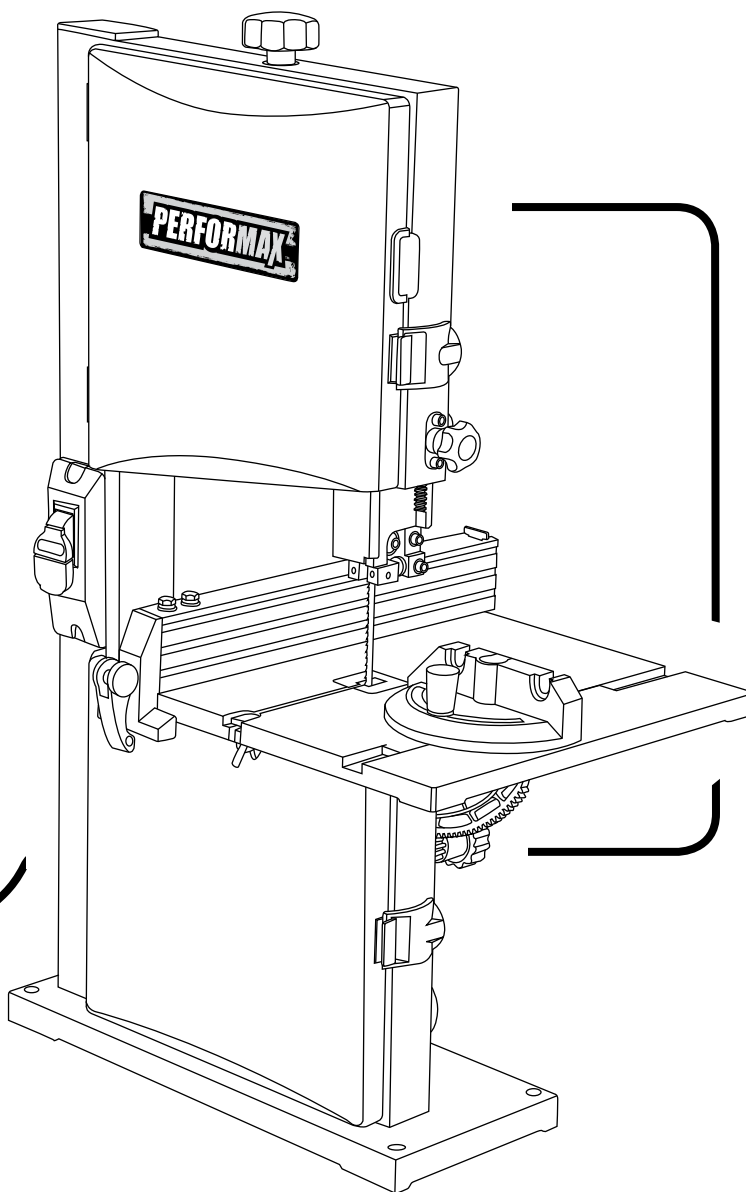

You will need this manual for safety instructions, operating procedures, and warranty. Put it and the original sales invoice in a safe, dry place for future reference.

TABLE OF CONTENTS

SECTION	PAGE
---------	------

SAFETY RULES	1
---------------------	----------

Work Preparation
Work Area Preparation
Tool Maintenance
Tool Operation

ASSEMBLY	2
-----------------	----------

Unpacking
Install Table Assembly
Mount Band Saw
Power Source
Grounding Instructions
Extension Cords
Motor

OPERATION	4
------------------	----------

Description
Safety Precautions
ON/OFF Switch
Replace Band Saw Blade
Adjust Blade Tracking Mechanism
Adjust Blade Tension
Adjust Blade Guides
Miter Gauge
Blade Width
Blade Pitch
Contour Sawing
Bevel Cutting

MAINTENANCE	7
--------------------	----------

Cleaning
Lubrication
Keep Tool in Repair

TROUBLESHOOTING	8
------------------------	----------

PARTS ILLUSTRATION & LIST	9
--	----------

WARRANTY	13
-----------------	-----------

PRODUCT SPECIFICATIONS

Maximum cutting width 9"
Maximum height of cut at 90° 3-5/8"
Maximum height of cut at 45° 2"
Table size 11¾ x 11¾"
Table tilt 0° to 45°
Wheel diameter 9.4"
Blade included 62" x 1/4" x 0.014" 6 TPI
Blade length 62"
Blade width 1/8 - 1/2"
Blade speed 2460 FPM
Overall dimensions 20 x 13 x 29"

⚠ WARNING

For your own safety, read and understand all warnings and operating instructions before using any tool or equipment.

⚠ WARNING

Some dust created by operation of power tool contains chemicals known to the State of California to cause cancer, birth defects or other reproductive harm. To reduce your exposure to these chemicals: work in a well ventilated area and work with approved safety equipment. Always wear OSHA/NIOSH approved, properly fitting face mask or respirator when using such tools.

⚠ WARNING

Failure to follow these rules may result in serious personal injury. Remember that being careless for even a fraction of a second can result in severe personal injury.

WORK PREPARATION

- Wear proper apparel. Do not wear loose clothing, gloves, neckties, rings, bracelets or other jewelry which may get caught in moving parts of the tool.
- Nonslip protective footwear is recommended.
- Wear protective hair covering to contain long hair.
- Wear eye and hearing protection. Always use safety glasses. Eye protection equipment should comply with ANSI Z87.1 standards. Hearing equipment should comply with ANSI S3.19 standards.
- Wear face mask or dust mask if operation is dusty.
- Be alert and think clearly. Never operate power tools when tired, intoxicated or when taking medications that cause drowsiness.

WORK AREA PREPARATION

- Keep work area clean. Cluttered work areas and benches invite accidents.
- Work area should be properly lighted.
- Do not use the machine in a dangerous environment. The use of power tools in damp or wet locations or in rain can cause shock or electrocution.
- Three-prong plug should be plugged directly into properly grounded, three-prong receptacle.
- Use the proper extension cord. Make sure your extension cord is in good condition and should have a grounding prong and the three wires of extension cord should be of the correct gauge.
- Keep children and visitors away. Your shop is a potentially dangerous environment. Children and visitors can be injured.
- Make your workshop childproof with padlocks, master switches or remove switch keys to prevent any unintentional use of power tools.

TOOL MAINTENANCE

- Turn the machine "OFF", and disconnect the machine from the power source prior to inspection.
- Maintain all tools and machines in peak condition. Keep tools sharp and clean for best and safest performance.
- Follow instructions for lubricating and changing accessories.
- Check for damaged parts. Check for alignment of moving parts, binding, breakage, mounting and any other condition that may affect tool's operation.
- Poorly maintained tools and machines can further damage the tool or machine and/or cause injury.
- A guard or any other part that is damaged should be repaired or replaced. Do not perform makeshift repairs.

TOOL OPERATION

- Avoid accidental start-up. Make sure that the tool is in the "OFF" position before plugging in.
- Use the right tool for your job. Do not force your tool or attachment to do a job for which it was not designed.
- Disconnect tool when changing parts.
- Don't force the workpiece on the machine. Damage to the machine and/or injury may result.
- Never leave tool running unattended. Turn the power off and do not leave tool until it comes to a complete stop.
- Do not overreach. Loss of balance can make you fall into a working machine, causing injury.
- Never stand on tool. Injury could occur if the tool tips, or if you accidentally contact the cutting tool.
- Know your tool. Learn the tool's operation, application and specific limitations before using it.
- Use recommended accessories. Use of improper accessories may cause damage to the machine or injury to the user.
- Handle workpiece correctly. Keep hands away from moving parts.
- Turn tool off if it jams.

CAUTION: Think safety! Safety is a combination of operator common sense and alertness at all times when tool is being used.

⚠ WARNING

Do not attempt to operate tool until it is completely assembled according to the instructions.


UNPACKING

Refer to Figure 1.

- Check for freight damage before opening the package. If freight damage is noticed, file claim with the carrier immediately.
- Check to ensure all parts are present. Contact Customer Service Center at 1-877-393-7121 immediately for missing parts.
- This band saw comes mostly assembled. It requires some additional assembling, installation, and adjustment before use.
- Locate the following parts before assembling:

- A Mitre Gauge Assembly
- B Table Assembly
- C Locking Handle with Washer
- D Table Locking Insert Assembly
- E Rip Fence

Figure 1 (not in scale)

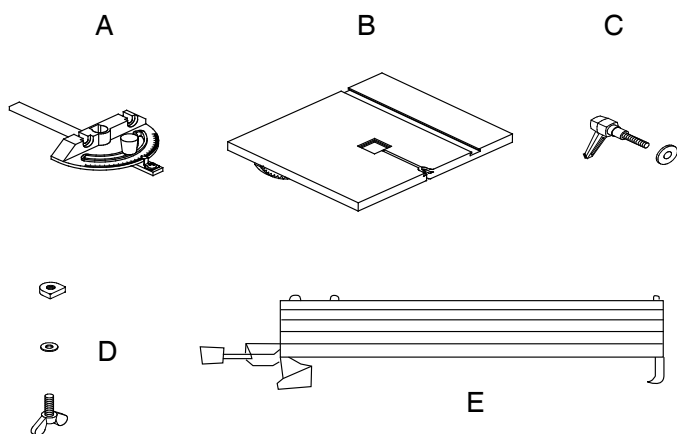


CAUTION: Do not attempt assembly if parts are missing. Use operator's manual to order replacement parts.

INSTALL TABLE ASSEMBLY

Refer to Figure 1 and 2

- Locate and remove the trunnion knob.
- Place the table assembly onto the saw frame.
- Replace and secure the trunnion knob.
- Use the provided lock screw handle with washer to secure the table assembly to the saw frame.
- The table tilt angle is adjustable. Use a combination square to calibrate the table tilt position. Set the table perpendicular to the saw blade and zero the pointer of table tilt scale.
- Install table slot locking assembly.

Figure 2

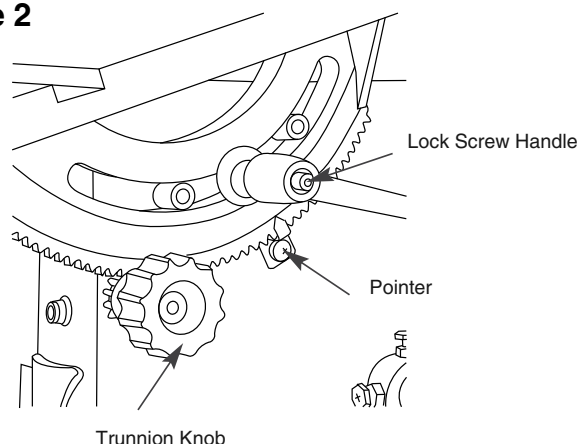


MOUNT BAND SAW

Refer to Figure 3

- The band saw must be installed in a well-lit area with correct power supply.
- Four mounting holes are on the base of band saw. If pre-drilled holes do not exist on the bench surface, drill four holes.
- Band saw can be installed on either a workbench or a tool stand by using bolts. Lock washers, and hex nuts. (mounting hardware not included)
- The band saw must be fastened to a firm and level surface.
- There must be enough clearance for the moving work piece during operation. There must be enough room for safe operation of the machine.

Figure 3

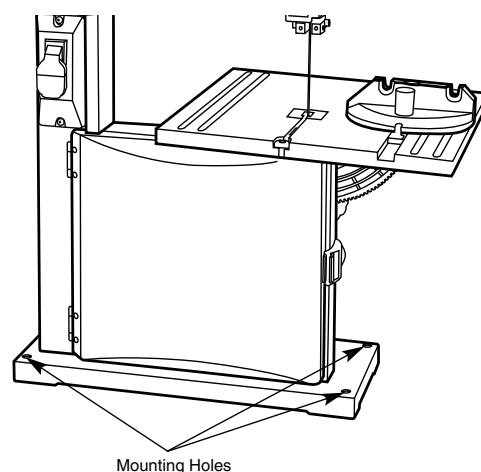

POWER SOURCE

⚠ WARNING

Do not connect to the power source until the machine is completely assembled.

The machine is wired for 120 volts, 60 HZ alternating current. Before connecting the machine to the power source, make sure the switch is in the "OFF" position. Running the unit on voltages which are not within range

may cause overheating and motor burn-out. Heavy loads require that voltage at motor terminals be no less than the voltage specified on nameplate.

- Power supply to the motor is controlled by a locking rocker switch. Remove the key to prevent unauthorized use.


GROUNDING INSTRUCTIONS

⚠ WARNING

Improper connection of equipment grounding conductor can result in the risk of electrical shock.

- The machine should be grounded while in use to protect operator from electrical shock.
- In the event of an electrical short circuit, grounding reduces the risk of electrical shock by providing an escape wire for the electric current.
- This machine is equipped with an approved 3-conductor cord rated at 150V and a 3-prong grounding type plug (Figure 4) for your protection against shock hazards.
- Grounding plug should be plugged directly into a properly installed and grounded 3-prong grounding-type receptacle, as shown (Figure 4)
- The plug must be plugged into an outlet that is properly installed and grounded in accordance with all local codes and ordinances.
- Check with a qualified electrician or service personnel if these instructions are not completely understood or if in doubt as to whether the tool is properly grounded.
- Do not modify plug provided. If it will not fit in outlet, have proper outlet installed by a qualified electrician. Use only 3-wire extension cords, that have 3-prong grounding type plugs and matching 3-conductor receptacles that accept the machine's plug, as show in Figure 4

Figure 4 - 3-Prong Receptacle

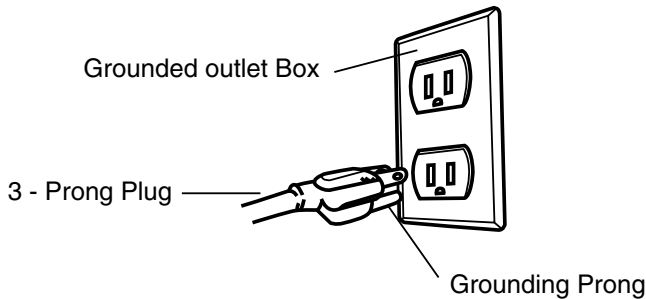


⚠ WARNING

Do not permit fingers to touch the terminals of plug when installing or removing from outlet.

- Inspect tool cords periodically, and if damaged, have repaired by an authorized service facility.
- The conductor with insulation having an outer surface that is green with or without yellow stripes is the equipment-grounding conductor. If repair or replacement of the electric cord or plug is necessary, do not connect the green (or green and yellow) wire to a live terminal.

A temporary 3-prong to 2-prong grounding adapter (see Figure 5) may be used to connect this plug to a matching 2-conductor receptacle as shown in figure 5. The temporary adapter should be used only until a properly grounded outlet can be installed by a qualified electrician.

Figure 5 - 2-Prong Receptacle

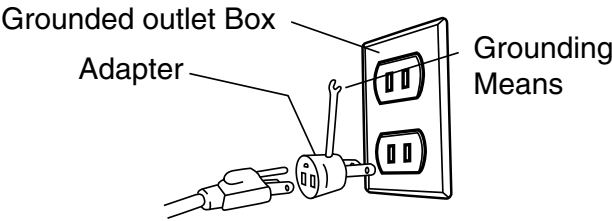

In Canada, the use of temporary adapter is not permitted by the Canadian Electric Code. Where permitted, the rigid green tab or terminal on the side of the adapter must be securely connected to a permanent electrical ground such as a properly grounded water pipe, a properly grounded outlet box or a properly grounded wire system.

- Many cover plate screws, water pipes and outlet boxes are not properly grounded. To ensure proper ground, grounding means must be tested by a qualified electrician.

EXTENSION CORDS

Use proper extension cords. Make sure the extension cord is in good condition. Use only 3-wire extension cords have 3-prong grounding type plugs and 3-pole receptacles which accept the tool plug. When using an extension cord, make sure to use one heavy enough to carry the current of the machine. An undersized cord will cause a drop in the voltage, resulting in loss of power and overheating. Use the table to determine the minimum wire size (A.W.G.) extension cord.

Extension Cord Length	
Wire Size	A.W.G.
Up to 25 ft.	18
25 to 50 ft.	16

NOTE: Using extension cords over 50 ft. long is not recommended.

MOTOR

The 120 Volt AC motor has the following specifications:

Horsepower	1/3
Voltage	120
Amps	2.5
Hertz	60
Phase	Single
RPM	1725

DESCRIPTION

- This 9" band saw has welded steel frame and cast iron table. It is designed to cut woods, plastics, and nonferrous metals. The solid durable structure will withstand continuous heavy-duty workloads for many years to come.
- This band saw is equipped with miter gauge for various precision operations.
- The versatile adjustable table can be easily tilted to any angle between 0 and 45 degrees.
- Simple and quick saw blade tension adjustment.
- Convenient and comprehensive saw blade tracking mechanism adjustment with view window for easy operation.
- Dust collection port makes healthy working environment possible.
- Powerful and durable Induction motor provides smooth and quiet operation.
- This 9" saw blade features many versatile functions, convenient operation, easy maintenance, durable structure, and aesthetic design. It should provide reliable service and please the professionals and hobbyists alike.

WARNING

For your own safety, read the entire operating manual and safety instructions before using this tool.

SAFETY PRECAUTIONS

- Be aware of general power tool safety. Make sure all the safety rules are understood.
- Disconnect the machine from power source whenever adjusting or replacing any parts.
- Do not plug in unless switch is in "OFF" position.
- Keep hands away from all moving parts.
- Wear eye protection or face shield during operation.
- Make sure all mobile parts move freely and are free from interference.
- Never turn the machine "ON" with the workpiece contacting the blade.
- Do not force cut. Slowing or stalling will overheat motor.
- Blade guard and thrust bearings should be positioned and adjusted correctly to prevent sideways and rearward movement of the blade.
- Properly adjust the blade tension, tracking, blade guides, and blade support bearings.
- Use proper saw blade according to type of workpiece.
- Allow the blade to reach full speed before cutting.
- Do not attempt to remove jammed objects from saw blade until the switch is turned OFF and the blade has completely stopped.
- Feed the workpiece through saw blade in a stable, slow, and constant manner.
- Hold the workpiece steadily on the table during operation.

- Turn switch off and disconnect power whenever the band saw is not in use.
- Keep band saw maintained following maintenance instructions.
- Lower blade guide to adjust above the intended workpiece before cutting.
- The saw blade must be properly tension and tracking adjusted before use.

ON/OFF SWITCH


Refer to figure 7

The ON/OFF switch is located on front of band saw. To turn the machine ON, pull the switch to the up position. To turn the machine OFF, push the switch to the down position.

NOTE: When the machine is not in use, the machine should be locked in the "OFF" position to prevent unauthorized use.

- To lock the machine, turn the switch to "OFF" position. Pull the key out. The switch cannot be turned on without the key.
- If the key is removed when the switch is at the "ON" position, the switch can be turned off but cannot be turned on again.
- To unlock, place the key into the slot on switch unit until it snaps.

Figure 6

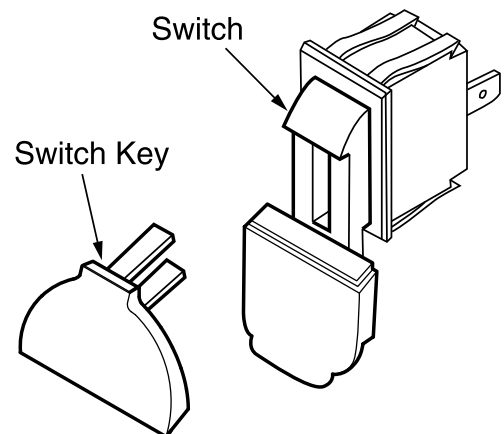

REPLACE BAND SAW BLADE

Refer to Figure 7 and 8

WARNING

Turn the switch to the "OFF" position and disconnect the machine from power source. Do wear leather gloves when servicing band saw blade. Do not wear any gloves when operating the band saw

- Turn blade tension knob counterclockwise to release blade tension.
- Unlock door latches and open both the upper and lower doors.

- Turn the blade guide knob, located below the upper door latch, to lower the Upper blade guide completely.
- Carefully unsnap and remove the blade guard panel.
- Release the table insert from the cast iron table.
- Unscrew and remove table locking insert assembly at the end of table slot.
- Carefully release the used blade and remove it through the slot on the cast iron table.
- Replace with a new blade only. Inspect the new blade first. The teeth of blade should point down when installed. If not, turn the blade inside out.
- Place the new blade through the cast iron table slot.
- Slide the blade onto the upper and lower blade wheels.
- Position the blade between the upper blade guide.
- Turn the blade tension lever clockwise until it stops.
- Close both upper and lower doors. The doors need to have appropriate seal for the dust collection system to function. Check to see the doors are in good alignment with the doorframes. Secure the door latches.
- Replace the table insert onto the cast iron table.
- Replace the table locking insert assembly.
- Snap the blade guard panel into position.
- Adjust blade tracking mechanism.
- Check blade tension. Adjust it if necessary.

Figure 7


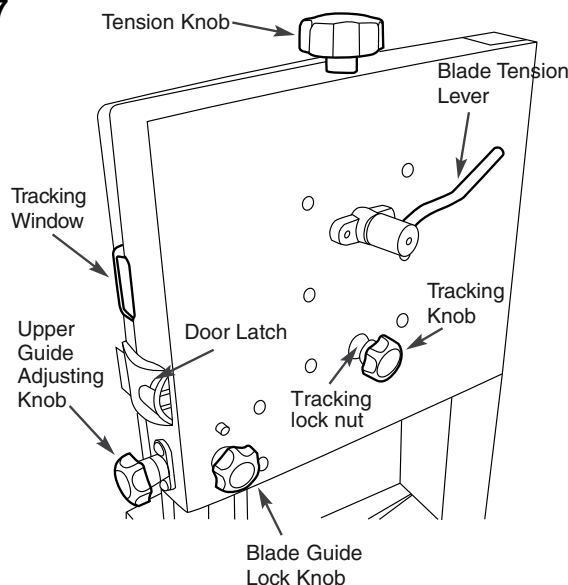


Figure 8

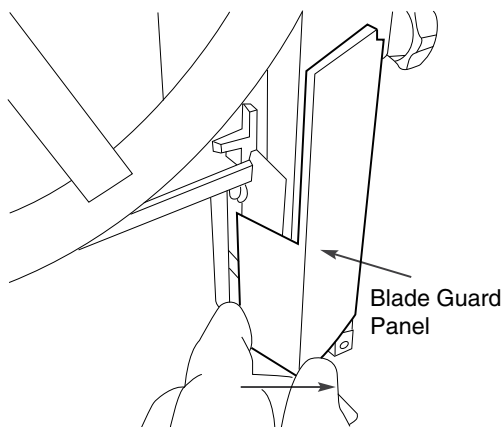

ADJUST BLADE TRACKING MECHANISM

Refer to Figure 7

⚠ WARNING

Watch for sharp blade edges when turning the wheels. Turn the switch to the OFF position and disconnect the machine from power source before adjusting blade tracking mechanism.

- Unlock door latches and open the doors.
- Manually rotate the drive wheel clockwise. The saw blade should travel downward at the table insert. Observe the blade movement from the viewing window on the side of upper door.
- If the saw blade stays centered on both wheels, No further adjustment is necessary.
- If the saw blade keeps tilting toward one side and is not in the center of idler wheel, the saw blade needs to be adjusted.
- Loosen the lock nut of the tracking control knob on the right upper side panel to release the tracking control knob.
- Carefully and slowly turn the idle wheel clockwise with the left hand and adjust the tracking control knob with the right hand until the blade is centered.
- Turn tracking knob counterclockwise when blade rides away from the upper door. Turn tracking knob clockwise when blade rides toward the upper door.
- Tighten the lock nut of tracking control knob when the blade is centered.
- Close the upper door.
- During the machine operation, the blade tracking can be observed from the viewing window.

ADJUST BLADE TENSION

Refer to Figure 7

- The blade tension is adjusted automatically by a spring-loaded blade tensioning mechanism and should require no frequent adjustment. However, there is blade tension knob on top of machine for fine tuning of the blade tension.
- Over tensioned blade is prone to excessive wear and breakage. Under tensioned blade is prone to fluttering and movement during operation.
- To adjust the blade tension, the blade cannot have any contact with the upper and lower blade guides. Raise the upper blade guide to the top. Move the blade guides away from the blade.
- Turn the machine on.
- Release the blade tension knob very slowly, ¼ turn at a time, until the blade starts to flutter.
- Now tighten the blade tension knob very slowly until the blade stop fluttering.
- Further tighten the blade tension knob for another ¼ turn.
- Turn the machine off.
- Properly adjust upper and lower blade guides before use.

ADJUST BLADE GUIDES

Refer to Figure 9 to 11

- Blade guides should not be in contact with the blade when not in operation.
- Adjust the blade guides after the blade tracking and blade tension have been properly adjusted.
- The blade guide supports the blade with bearings on the real and guide pins on both sides. They all should be adjusted to be 0.016" inches away from the blade. Use feeler gauge for accurate measurement. For a quick gauge, fold a dollar bill in half twice and place it between the blade and the guide pins or the bearings. The thickness of 4x dollar bill is approximately 0.016".
- To adjust the guide pin position, loosen the screw on each guide pin block. Secure the screws after adjustment. Do the same for upper and lower blade guides.
- Adjust the upper blade guide bearings position by loosening the socket head bolt behind the bearings and reposition the blade guide shaft. Tighten the bolt after adjustment.
- Adjust the lower blade guide bearings position by loosening the socket head bolt behind the bearings and reposition the blade guide bracket. Tighten the bolt after adjustment.

Figure 9

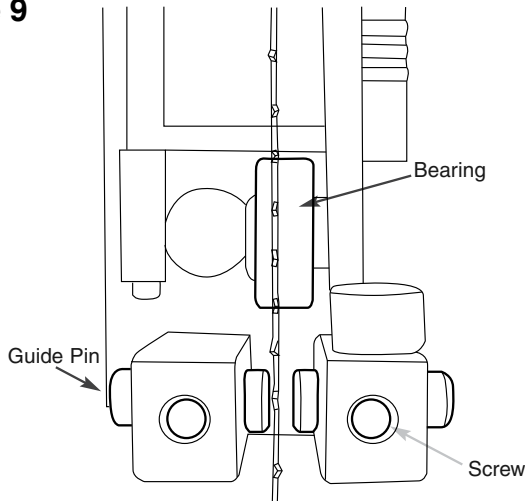


Figure 10


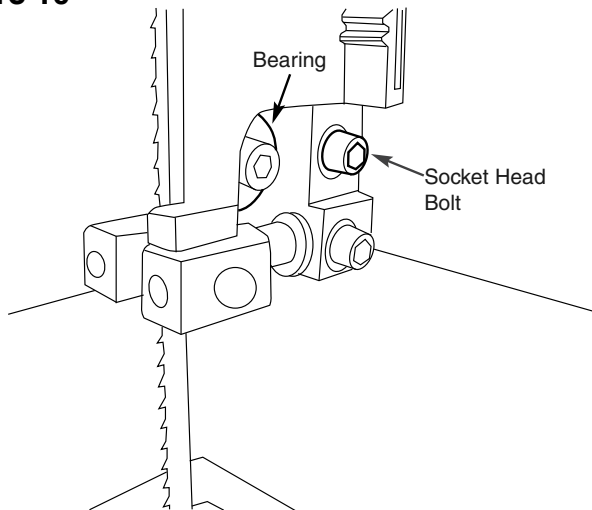


Figure 11

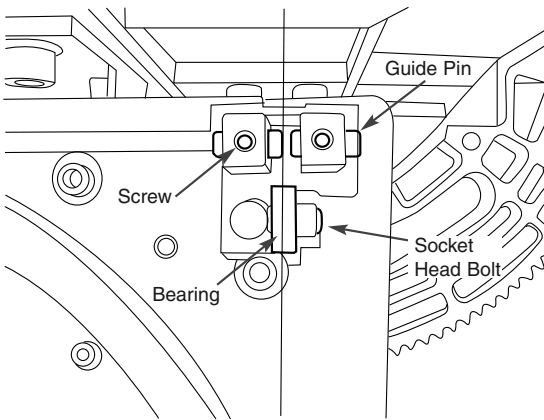

MITER GAUGE

⚠ WARNING

Do not use miter gauge and rip fence at the same time. Operator could be injured or/and the workpiece could be damaged because the blade might bind in the workpiece.

- To adjust miter gauge, use a square with one edge against the miter gauge face and the other against the blade face.
- Loosen the lock knob on the miter gauge and adjust to the right position.
- Tighten the lock knob and loosen the pointer screw and adjust the pointer to 0° and tighten the screw on the pointer.

BLADE WIDTH

- Blade width is the distance from tip of a tooth to back of blade. The band saw blade width ranges from 1/8" to 1/2". Curve cutting of 1/8" radius needs the blade width of 1/8". Use blade width of 1/4" for cutting radius of 5/8". Use blade width of 3/8" for 1-1/4" cutting radius.

BLADE PITCH

- Pitch is the number of teeth per inch (TPI) or tooth size.
- More teeth per inch will cut slower but produce smoother cutting surface; while fewer teeth per inch will cut rougher but faster.
- For soft wood, the proper blade has between 6 to 8 teeth per inch.
- For hard wood, use a blade with 8 to 12 teeth per inch.
- Blade shocking occurs when pitch is too large and blade tooth encounters too much material. This can trip teeth from blade.

CONTOUR SAWING

- Contour cutting is guiding workpiece free-handed to produce curved shapes.
- Turn the workpiece carefully so the blade follows without twisting.
- Use a narrower blade to cut abrupt curves or make relief cuts.

BEVEL CUTTING

- Beveled cutting is to tilt saw table for the desired degree.
- Loosen locking handle to unlock table.
- Rotate knob to tilt table to desired position.
- Lock table by tightening locking handle.

MAINTENANCE

7

WARNING

Turn the switch to the "OFF" position and disconnect the machine from power source before servicing or disassembling any components.

CLEANING

- Keep machine and workplace clean. Avoid accumulation of sawdust on the tool.
- Be certain motor is kept clean and free of dust.
- Use soap and water to clean painted parts, rubber parts and plastic guards.
- Keep wheels clean. Debris on wheels will cause poor tracking and blade slippage.
- Make sure blade brush is in contact with blade to properly remove foreign particles from drive wheel.


LUBRICATION

- The shielded ball bearings are permanently lubricated and require no further lubrication.
- Small amount of oil can be applied to belt tension assembly and thread or sliding surfaces.

KEEP TOOL IN REPAIR

- If power cord is worn, cut or damaged in any way, do not operate the machine.
- Replace any worn, damaged, or missing parts. Use parts listed to order parts.
- Any attempt to repair motor may create a hazard unless repair is done by a qualified service technician.
- Call the customer line at 1-877-393-7121.

SYMPTON	POSSIBLE CAUSE(S)	SOLUTIONS
Motor will not start	1. Low voltage 2. Short circuit in line cord or plug 3. Short circuit in motor 4. Open circuit or loose connection in motor 5. Incorrect fuses or circuit breakers 6. Defective switch 7. Defective capacitor	1. Check power supply for proper voltage 2. Inspect line cord and plug for faulty insulation or shorted connection 3. Inspect connection on motor. 4. Inspect connection on motor 5. Replace with correct fuses or circuit breakers 6. Replace switch 7. Replace capacitor
Motor stalls or fails to reach full speed	1. Power overload 2. Low voltage from power supply 3. Undersized line cord 4. Motor overload 5. Short circuit or loose connection in motor 6. Incorrect fuses or circuit breakers	1. Reduce workload on the power supply 2. Check power supply for proper voltage 3. Use line cord of adequate size or reduce length of wiring 4. Reduce load on motor 5. Inspect the connection in motor for loose or shorted connection 6. Replace with correct fuses or circuit breakers
Motor overheats	Motor overloaded	Reduce load on motor. Turn off the machine until motor cools down
Machine slows down while operating	Applying too much pressure during operation	Ease up on pressure
Excessive vibration	1. Band saw not mounted securely to stand 2. Uneven stand surface 3. Worn belt 4. Pulley not aligned 5. Loose or damage blade	1. Tighten band saw to stand 2. Level stand 3. Replace belt 4. Adjust pulley 5. Tighten or replace blade
Rough cuts	1. Too much feed 2. Coarse blade	1. Reduce feed 2. Replace with fine blade
Crooked cuts	1. Feed too fast 2. Blade is dull 3. Loose blade guide assembly or blade thrust bearing 4. Upper blade guide too far from workpiece 5. Workpiece not in square position	1. Reduce feed rate 2. Replace blade 3. Tighten blade thrust bearing with in 0.016" behind blade back 4. Adjust blade guide to a proper position 5. Use miter gauge or tilt table to 90 °
Excessive blade breakage	1. Bad weld on blade 2. Force wide blade for small radius 3. Dull blade 4. Upper blade guide too high 5. Blade not tensioned properly 6. Improper blade wheel tracking	1. Replace blade 2. Replace to a narrow blade 3. Replace blade 4. Adjust blade guide 5. Tighten blade tension 6. Adjust blade tracking

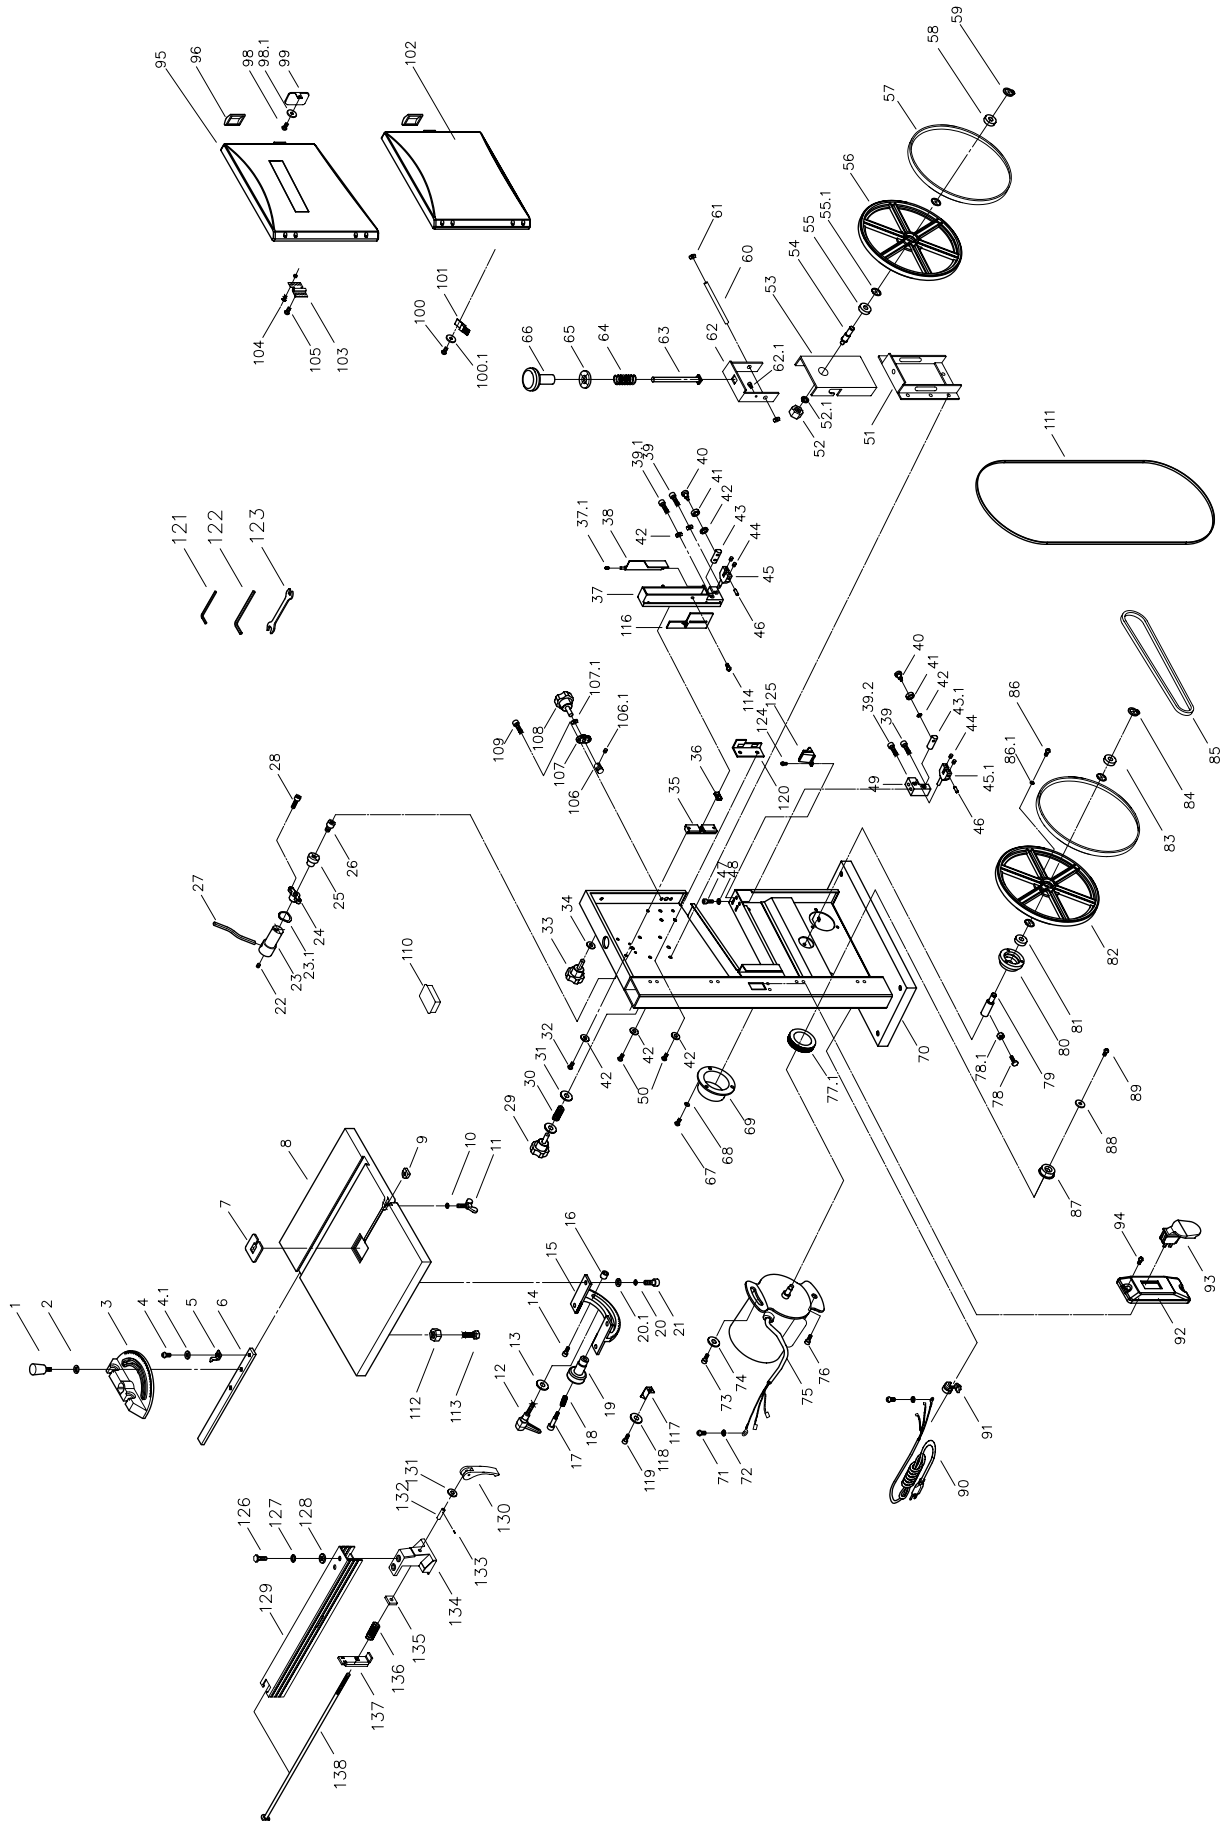

Key No.	Part No.	Description	Specification	Qty	Key No.	Part No.	Description	Specification	Qty
1	BS900001	HANDLE		1	52	BS900060	HEXAGONAL NUT	M10	1
2	BS900002	FLAT WASHER	Ø6.3xØ16x1.5t	1	52.1	BS900061	SPRING WASHER	Ø10	1
3	BS900003	MITER GAUGE SCALE		1	53	BS900062	TRACKING ADJUSTMENT BRACKET		1
4	BS900004	PAN HEAD SCREW	M4x6	1	54	BS900063	SHAFT		1
4.1	BS900005	FLAT WASHER	Ø4	1	55	BS900064	BEARING	6000-2RZ	1
5	BS900006	INDICATOR		1	55.1	BS900065	RETAINING RING	Ø26	4
6	BS900007	MITER GAUGE BAR		1	56	BS900066	IDLER WHEEL		1
7	BS900008	TABLE INSERT		1	57	BS900067	WHEEL BAND	Ø234xØ239.6x12W	2
8	BS900009	TABLE		1	58	BS900068	BEARING	6000-2RZ	1
9	BS900010	NUT		1	59	BS900069	RETAINING RING	STW10	1
10	BS900011	SPRING WASHER	Ø6	1	60	BS900070	PIN	Ø8x90L	1
11	BS900012	WING SCREW	M6xP1.0x15L	1	61	BS900071	PUSH NUT	Ø7.8xØ13	2
12	BS900013	LOCK SCREW	M8*25L	1	62	BS900072	TENSION BRACKET		1
13	BS900014	FLAT WASHER	Ø8.4xØ24x2L	1	62.1	BS900073	HEX SOC HD SCR	M5x6L	1
14	BS900015	HEX SOC HD SCR	M6x14L(16L)	2	63	BS900074	SCREW BOLT	M8*80L	1
15	BS900016	TRUNNION		1	64	BS900075	SPRING		1
16	BS900017	BUSHING		2	65	BS900076	FLAT WASHER	Ø8	1
17	BS900018	ROTATE BOLT		1	66	BS900077	HANDLE		1
18	BS900019	SPRING		1	67	BS900078	PAN HEAD SCREW	M5*10L	3
19	BS900020	HANDLE		1	68	BS900079	FLAT WASHER	Ø5	3
20	BS900021	SPRING WASHER	Ø8	4	69	BS900080	DUST CHUTE		1
20.1	BS900023	FLAT WASHER	Ø9	4	70	BS900081	CABINET		1
21	BS900022	HEX SOC HD SCR	M8x14L(16L)	4	71	BS900082	PAN HEAD SCREW	M5x8L	2
22	BS900024	SET SCREW	M5*P0.8*6L	1	72	BS900083	EXT TOOTH WASHER	¢ 5.3* ¢ 10	2
23	BS900025	HANDLE		1	73	BS900084	HEX SOC HD SCR	M8x20L	1
23.1	BS900026	WASHER	Ø16xØ21x0.3T	1	74	BS900085	FLAT WASHER	Ø8.4xØ24x2L	1
24	BS900027	SLEEVE		1	75	BS900086	MOTOR		1
25	BS900028	ECCENTRIC		1	76	BS900087	HEX SOC HD SCR	M8x20L	1
26	BS900029	HEX SOC HD SCR	M6*16L	1	77.1	BS900088	SEAL	8Wx5Hx120L	1
27	BS900030	ECCENTRIC SHAFT		1	78	BS900089	HEX HEAD SCREW	M6*16L	4
28	BS900031	HEX SOC HD SCR	M5xP0.8x10L	2	78.1	BS900090	HEXAGONAL NUT	M6	4
29	BS900032	HANDLE		1	79	BS900091	SHAFT		1
30	BS900033	SPRING		1	80	BS900092	PULLEY		1
31	BS900034	FLAT WASHER	Ø8	2	81	BS900093	BEARING	6000-2RZ	1
32	BS900035	PAN HEAD SCREW	M5*12L	2	82	BS900094	LOWER WHEEL		1
33	BS900036	HANDLE		1	83	BS900095	BEARING	6000-2RZ	1
34	BS900037	FLAT WASHER	Ø8	1	84	BS900096	RETAINING RING	STW10	1
35	BS900038	FIXING PLATE		1	85	BS900097	BELT	130XL*10.0	1
36	BS900039	SQUARE NUT		1	86	BS900098	TAP SCREW	M5X16	3
37	BS900040	GUIDE BAR		1	86.1	BS900099	SPRING WASHER	Ø5	3
37.1	BS900041	SPRING		1	87	BS900100	PULLEY		1
38	BS900042	BLADES GUARD		1	88	BS900101	FLAT WASHER	Ø5.3xØ15x1.2L	1
39	BS900043	HEX SOC HD SCR	M5xP0.8x10L	2	89	BS900102	FLAT HD SCR	M5*8L	1
39.1	BS900044	HEX SOC HD SCR	M5xP0.8x16L	1	90	BS900103	POWER CORD		1
39.2	BS900045	HEX SOC HD SCR	M5xP0.8x12L	1	91	BS900104	STRAIN RELIEF	6P-4	2
40	BS900046	SCREW		2	92	BS900105	SWITCH BOX		1
41	BS900047	BEARING	606-2RZ	2	93	BS900106	SWITCH	HY7(4)	1
42	BS900048	FLAT WASHER	Ø5	14	94	BS900107	PAN HEAD SCREW	M5*10L	2
43	BS900049	UPPER BEARING BRACKET		1	95	BS900108	UPPER DOOR		1
43.1	BS900050	LOWER BEARING BRACKET		1	96	BS900109	LATCH		2
44	BS900051	FLAT HD SCR	M4*6L	4	98	BS900110	TAP SCREW	ST4.2*6L	1
45	BS900052	GUIDE BLOCK		1	98.1	BS900111	FLAT WASHER	Ø4	1
45.1	BS900053	GUIDE BLOCK		1	99	BS900112	LUCENCY WINDOW		1
46	BS900054	PIN	Ø5x14L	4	100	BS900113	TAP SCREW	ST4.8*10L	1
47	BS900055	HEX SOC HD SCR	M6x8L	2	100.1	BS900114	FLAT WASHER	Ø5	1
48	BS900056	FLAT WASHER	Ø6.4xØ18x1.6t	2	101	BS900115	BLADES BRUSH		1
49	BS900057	LOWER GUIDE BLOCK		1	102	BS900116	LOWER DOOR		1
50	BS900058	PAN HEAD SCREW	M5*8L	9	103	BS900118	HINGE	38L*30W*1.2T	4
51	BS900059	UPPER CABINET SUPPORT		1	104	BS900119	RIVET	M4x10L+M4	8

9" BAND SAW PARTS LIST

11

Key No.	Part No.	Description	Specification	Qty	Key No.	Part No.	Description	Specification	Qty
105	BS900120	TAP SCREW	Ø4*8L	8	122	BS900138	HEX WRENCH	M4 × 70 × 25	1
106	BS900121	PINION		1	123	BS900139	OPEN END WRENCH	10 X 12mm	1
106.1	BS900122	SET SCREW	M4*4L	1	124	BS900140	PAN HEAD SCREW	M4x8L	2
107	BS900123	BRACKET		1	125	BS900141	BLADE SAFE COVER		1
107.1	BS900124	WASHER	Ø6	1	126	BS900142	HEX HEAD SCREW	M6x16L	2
108	BS900125	HANDLE		1	127	BS900143	SPRING WASHER	Ø6	2
109	BS900126	HEX SOC HD SCR	M5xP0.8x10L	2	128	BS900144	FALT WASHER	Ø6	2
110	BS900127	PLUG		1	129	BS900145	FENCE		1
111	BS900128	BLADES	62'L*6mmW*0.3mmT	1	130	BS900146	HANDLE		1
112	BS900129	HEXAGONAL NUT	M6	1	131	BS900147	FLAT WAHSER	Ø8xØ16x1.5t	1
113	BS900130	HEX HEAD SCREW	M6*23L	1	132	BS900148	SHEATH		1
114	BS900131	TAP SCREW	M4x10L	1	133	BS900149	SPRING PIN	Ø3x16L	1
116	BS900132	GUARD		1	134	BS900150	QUIET PALTE		1
117	BS900133	POINTER		1	135	BS900151	PAD		1
118	BS900134	FLAT WASHER	Ø5	1	136	BS900152	SPRING		1
119	BS900135	HEX SOC HD SCR	M5xP0.8x8L	1	137	BS900153	MOVING PLATE		1
120	BS900136	RESTRAINER		1	138	BS900154	SHAFT		1
121	BS900137	HEX WRENCH	M2 × 48 × 16	1					

30-DAY MONEY BACK GUARANTEE:

This PERFORMAX™ brand power tool carries our 30-Day Money Back Guarantee. If you are not completely satisfied with your PERFORMAX™ brand power tool for any reason within thirty (30) days from the date of purchase, return the tool with your original receipt to any MENARDS® retail store, and we will provide you a refund – no questions asked.

2-YEAR LIMITED WARRANTY:

This PERFORMAX™ brand power tool carries a 2-Year Limited Warranty to the original purchaser. If, during normal use, this PERFORMAX™ power tool breaks or fails due to a defect in material or workmanship within two (2) years from the date of original purchase, simply bring this tool with the original sales receipt back to your nearest MENARDS® retail store. At its discretion, PERFORMAX™ agrees to have the tool or any defective part(s) repaired or replaced with the same or similar PERFORMAX™ product or part free of charge, within the stated warranty period, when returned by the original purchaser with original sales receipt. Notwithstanding the foregoing, this limited warranty does not cover any damage that has resulted from abuse or misuse of the Merchandise. This warranty: (1) excludes expendable parts including but not limited to blades, brushes, belts, bits, light bulbs, and/or batteries; (2) shall be void if this tool is used for commercial and/or rental purposes; and (3) does not cover any losses, injuries to persons/property or costs. This warranty does give you specific legal rights and you may have other rights, which vary from state to state. Be careful, tools are dangerous if improperly used or maintained. Seller's employees are not qualified to advise you on the use of this Merchandise. Any oral representation(s) made will not be binding on seller or its employees. The rights under this limited warranty are to the original purchaser of the Merchandise and may not be transferred to any subsequent owner. This limited warranty is in lieu of all warranties, expressed or implied including warranties or merchantability and fitness for a particular purpose. Seller shall not be liable for any special, incidental, or consequential damages. The sole exclusive remedy against the seller will be for the replacement of any defects as provided herein, as long as the seller is willing or able to replace this product or is willing to refund the purchase price as provided above. For insurance purposes, seller is not allowed to demonstrate any of these power tools for you.

For questions / comments, technical assistance or repair parts
Please Call Toll Free at: 1-877-393-7121 (M-F 9am – 5pm)

SAVE YOUR RECEIPTS. THIS WARRANTY IS VOID WITHOUT THEM.



Menard, Inc.
Eau Claire, WI 54703